

# Carbon Steel Ball Valve




2 Piece • Full Port • Flanged Connections • Class 300 •  
Stainless Steel Ball and Stem



FL-CS-100-300

CRN# 0C15754.524

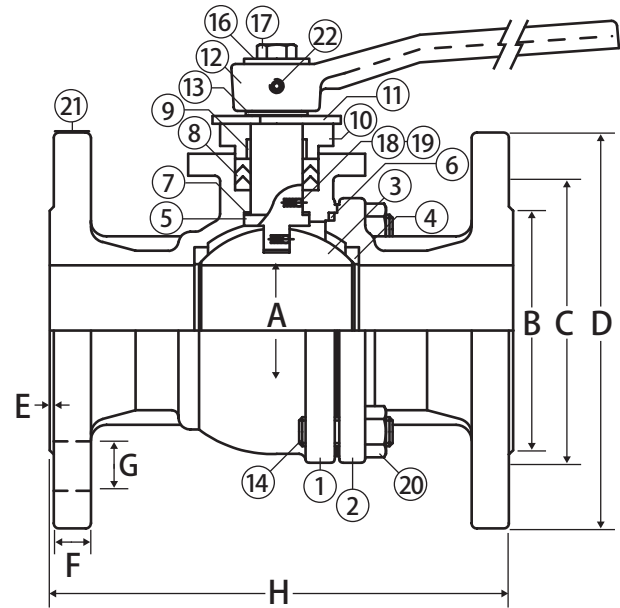

## Features


- Wrench operator
- Fire safe stem and body graphite seals
- Air tested seat leakage: 85 PSI
- Hydraulic tested body: 1124 PSI
- Locking device comes standard
- 100% leak tested
- Wetted surfaces contain less than .25% lead content

## Approvals

- CSA Certified
  - ASME B16.33 (125 PSIG) (2")
  - ASME B16.38 (125PSIG) (3"-8")
  - CSA 3.16 (125 PSIG) (2"-8")
- Conforms to ANSI B16.34
- Flange: ANSI B16.5
- Face to Face: ANSI B16.10
- API 607 Fire Safe
- NACE 01-75 Stainless Steel Approved

## Valve Seat Rating

Class 300: 700 WUG, Class 150: 300 WUG - 150 WSP

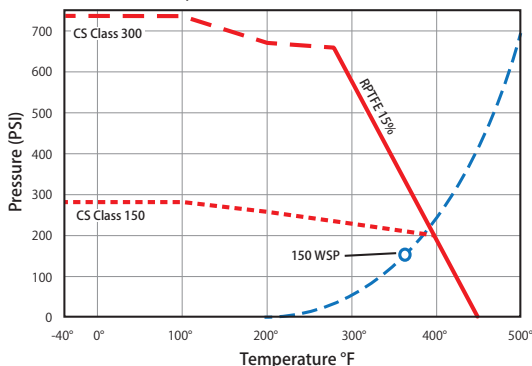

**WARNING:** This product can expose you to chemicals including diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and diisononyl phthalate (DINP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## Material Specifications

No.	Part	Materials
1	Body	WCB Carbon Steel
2	Body Cap	WCB Carbon Steel
3	Ball	CF8 Stainless Steel
4	Seat (2) <sup>†</sup>	RPTFE - 15%
5	Stem	304 Stainless Steel
6	Body Seal <sup>†</sup>	PTFE / Graphite
7	Stem Seal <sup>†</sup>	PTFE
8	Packing Gland (3) <sup>†</sup>	PTFE / Graphite
9	Gland Bushing <sup>†</sup>	PTFE
10	Gland Flange	CF8 Stainless Steel
11	Stop Plate	304 Stainless Steel
12	Handle	Ductile Iron
13	Snap Ring	301 Stainless Steel
14	Body Bolt (4 or 6)	A193-B8 Steel
15	Gland Bolt (2)*	A193-B8 Steel
16	Handle Washer	304 Stainless Steel
17	Handle Bolt	304 Stainless Steel
18	Static Device (2)	304 Stainless Steel
19	Spring (2)*	304 Stainless Steel
20	Body Nut (4 or 6)**	A194-8M Steel
21	Tag	304 Stainless Steel
22	Set Screw	304 Stainless Steel

\* Not shown in drawing, \*\* Component only on +5" valves, <sup>†</sup>Included in repair kit

## Dimensions

Part No.	Size	A	B	C	D	E	F	G	H	Bolts	Torque
600-228	2"	1.97	3.62	5.00	6.50	0.06	0.88	0.75	8.50	8	1068
600-230	3"	3.15	5.00	6.62	8.27	0.06	1.17	0.88	11.10	8	1752
600-231	4"	3.94	6.19	7.88	10.00	0.06	1.25	0.88	12.00	8	3216
600-232	6"	5.90	8.51	10.64	12.53	0.06	1.44	0.88	15.88	12	6900
600-233*	8"	7.88	10.64	13.00	15.01	0.06	1.62	1.00	19.75	12	16620

\*8" Special Order