

Thermoplastic Check Valve



**PVC • In-Line Check • Schedule 40 • Solvent Connection •
150 WOG**



S-711

Features


- **NPS connections**
- Installs horizontally or vertically
- Stainless steel spring-loaded PVC poppet
- Spring activates at .5 PSI
- Wetted surfaces contain less than .25% lead content

Approvals

ASTM F1970

Pressure Rating

- Max service temperature 140°F, 150 PSI @ 73°F continuous

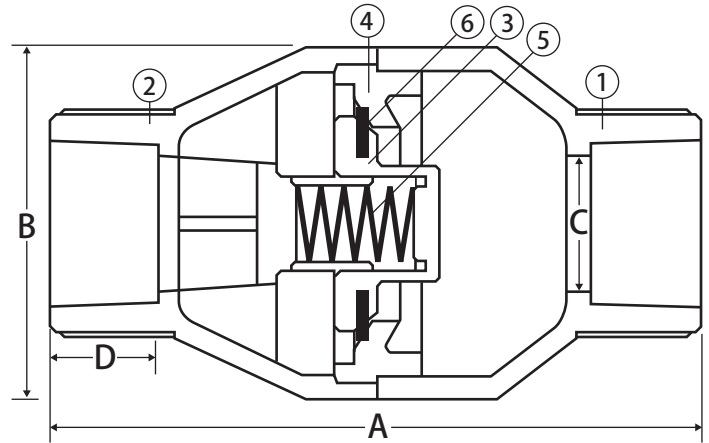

Material Specifications

No.	Part	Materials
1	Body	UPVC
2	End Connection	UPVC
3	Check	UPVC
4	Seat	UPVC
5	Spring	304 Stainless Steel
6	Seal	EPDM

Dimensions

Part No.	Size	A	B	C	D
210-323	1/2"	4.17	2.20	0.67	0.87
210-324	3/4"	4.13	2.20	0.83	1.00
210-325	1"	5.24	2.87	1.10	1.13
210-326	1-1/4"	6.18	3.58	1.38	1.25
210-327	1-1/2"	6.18	3.58	1.54	1.38
210-328	2"	7.01	4.21	2.05	1.50