


Thermoplastic Check Valve



PVC • In-Line Check • Schedule 40 • Solvent Connection •
150 WOG



S-711

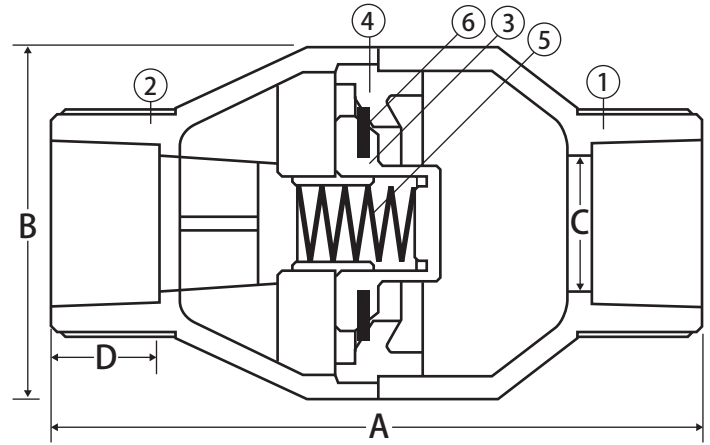

Features

- **NPS connections**
- Installs horizontally or vertically
- Stainless steel spring-loaded PVC poppet
- Spring activates at .5 PSI
- Wetted surfaces contain less than .25% lead content

Approvals

ASTM F1970

Pressure Rating

- Max service temperature 140°F, 150 PSI @ 73°F continuous



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Material Specifications

No.	Part	Materials
1	Body	UPVC
2	End Connection	UPVC
3	Check	UPVC
4	Seat	UPVC
5	Spring	304 Stainless Steel
6	Seal	EPDM

Dimensions

Part No.	Size	A	B	C	D
210-323	1/2"	4.17	2.20	0.67	0.87
210-324	3/4"	4.13	2.20	0.83	1.00
210-325	1"	5.24	2.87	1.10	1.13
210-326	1-1/4"	6.18	3.58	1.38	1.25
210-327	1-1/2"	6.18	3.58	1.54	1.38
210-328	2"	7.01	4.21	2.05	1.50