


Stainless Steel Ball Valve

3 Piece 4 Bolt, Swing Out Body, Full Port, Threaded x Square Flange Connection, Side Tap, Stainless Steel Trim, 1000 WOG

T-SS-1000N-4B NPT X SQUARE FLANGE W/SIDE TAP

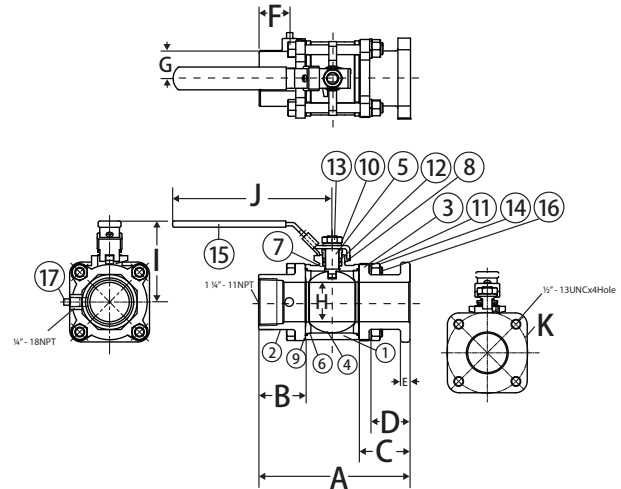

FEATURES


- Type B Flange Face
- Latch Lock Handle May be Locked in Open or Closed Position
- 29 in-HG Vacuum Rating
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content
- Mating Flanges Available
- Repair Kits Available

CERTIFICATIONS/APPROVALS

- UL Listed
 - MHKZ - Manual valves
 - YQNZ - Compressed gas shut-off valves
 - YRBX - Flammable liquid shut-off valves
 - YRPV - Gas shut-off valves
 - YSDT - LP gas shut-off valves
 - YQAR - Anhydrous ammonia shut-off valves
- MSS SP-110
- NACE Certified
- ANSI B1.20.1
- ANSI B16.11
- Conforms to API 598
- Buy American Act Compliant

VALVE SEAT RATING

1000 WOG - 150 WSP

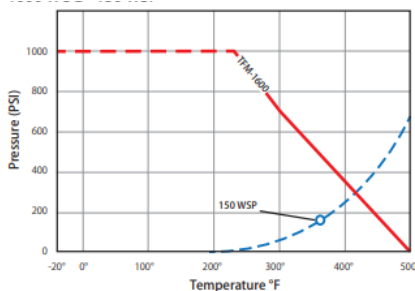

MATERIALS

No.	Part	Material
1	Body	A351-CF8M
2	Body Cap	A351-CF8M
3	Square Flanged	A351-CF8M
4	Ball	A351-CF8M
5	Stem	Stainless Steel 316
6	Seat	TFM 1600
7	Stem Seal	TFM 1600
8	Stem Packing	Graphite
9	Union Seal	TFM 1600
10	Spring Washer	Stainless Steel 304
11	Washer	Stainless Steel 304
12	Gland	Stainless Steel 316
13	Handle Nut	Stainless Steel 304
14	Cap Nut	Stainless Steel 304
15	Handle	Stainless Steel 304
16	Cap Bolt	Stainless Steel 304
17	Stud Bolt	Stainless Steel 316

DIMENSIONS

Part No	Size	A	B	C	D	E	F	G	H	I	J	K
501-356	1-1/4"	5.51	1.91	1.82	1.37	0.41	1.16	1.63	1.25	3.66	7.36	4.06